




CARACTÉRISTIQUES TECHNIQUES



EN388

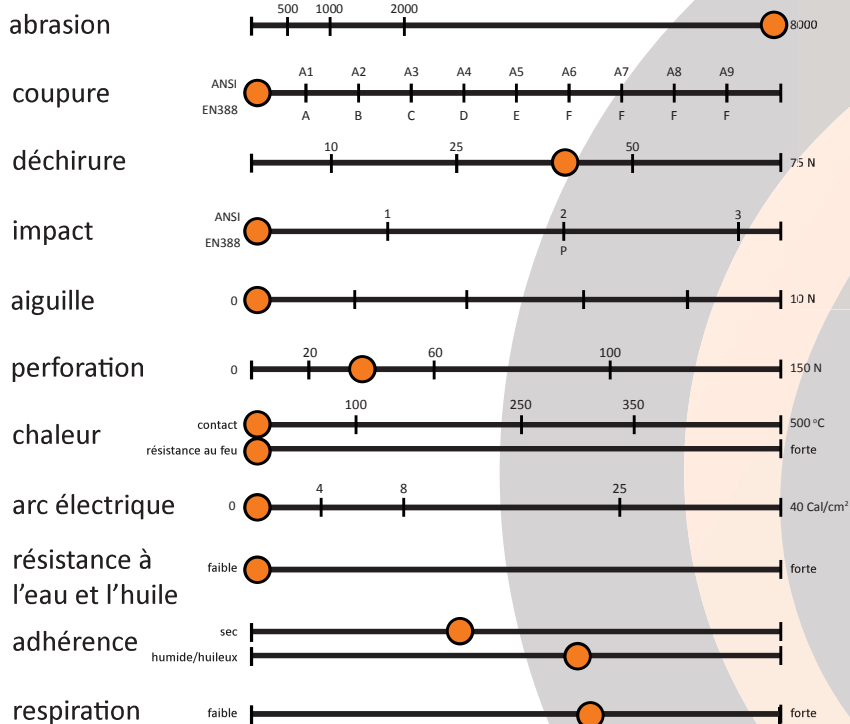

4121X

A: ABRASION (1-4)
B: COUPURE (1-5)
C: DÉCHIRURE (1-4)
D: PERFORATION (1-4)
F: ISO COUPURE (A-F)
P: IMPACT (P=godkänd)

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N

Art.nr: 15-1ANI
60 paires (5 dussin)/carton

CE
CAT II

7	8	9	10	11
XS	S	M	L	XL